


# TUALAJ 4200-MINI GNSS ANTI-JAM CRPA SYSTEM

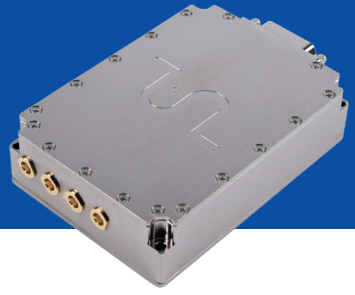

## GENERAL DESCRIPTION

TUALCOM Anti-Jam GNSS CRPA System supports critical missions by providing jam free GNSS signals.

The system eliminates interference by applying novel beamforming techniques. With a 4-array CRPA antenna, the system can assure the normal operation of GNSS receiver in presence of multiple jamming sources.

TUALCOM Anti-Jam GNSS CRPA System can be employed using various configurations and operates with civil and military GPS receivers for the land, sea, air platforms (including unmanned aerial systems) and fixed installations. The product has an embedded GNSS receiver that supports all satellite constellations. Wide bandwidth of the system also enables the SBAS signals to GNSS receiver.

The system can be provided with various types of antennas. Physical solutions for further suppression performance such as elevation masking can also be provided as antenna option.

## BENEFITS

- Immediate availability for urgent operational needs
- Simple assembly means easy to install or retrofit
- Compatible with all types of external GPS receivers and vehicle navigation systems
- Minimal integration training required
- Light Weight
- Ultra Compact Size
- Superior Suppression Performance
- Embedded GNSS Receiver Option
- Integrates easily into new or legacy platforms
- Assured PNT

## APPLICATION AREAS

- Fixed Winged Aircraft
- Rotary Wing Aircraft
- Guided Munitions
- Unmanned Autonomous Systems
- Armored Vehicles
- Naval Platforms, Coast Guard Platforms
- Maritime Cybersecurity
- Advanced Transportation Systems
- Military Communications
- Armored Trucks, Critical Asset Tracking

# TUALAJ 4200-MINI

## GNSS ANTI-JAM CRPA SYSTEM



### Dimensions (cm)

7.9 x 5.65 x 2.1

### Weight (g)

165

### Power Consumption (w)

< 12 W

### Antenna Array

4 Array CRPA Antenna

### Simultaneous Independent Nulling

3

### Simultaneous Active Bands

GPS L1  
GPS L2 or GLONASS G1  
GALILEO E1  
BEIDOU B1C SBAS

### Nominal Wideband Suppression

>40 dB

### Data Interfaces

Ethernet, Serial

### Bandwidth

Up to 30 Mhz  
(depends to selected band option)

### Connectors

5x MCX Female,  
Micro-D 25-pin Socket

### Operating Voltage

12-28 Vdc

### Operating Temperature

-40 °C to +85 °C

### Internal GNSS Receiver

BeiDou (B1C), Galileo (E1),  
SBAS GLONASS (L1), GPS (L1)

### Internal GNSS Tracking Sensitivity

-164 dBm

### RTCM Support

Yes

### Environmental Tests

MIL-STD-810G

### EMI / EMC

MIL-STD-461F

**TUALCOM ELEKTRONİK A.Ş.**

+90 (312) 485 22 85

info@tualcom.com.tr

www.tualcom.com.tr



© 2021 TUALCOM; The information contained herein is subject to change without notice. TUALCOM A.Ş. cannot be held responsible for this and no liability is accepted for any errors or omissions.